


Surface on which the robot is fitted. It should be flat within  $\pm 0.05\text{mm}$



Outer diameter of robot mounting flange

$\phi 8.5$   
OR  
M8  $\nabla$  12 (4)

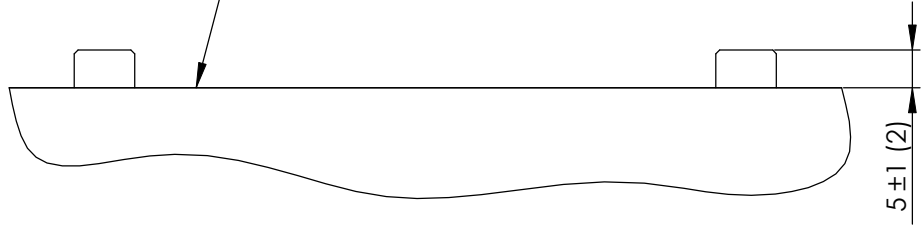